Masonry Boxes
and Accessories

IBERVILLE®

CIMBS-1-K

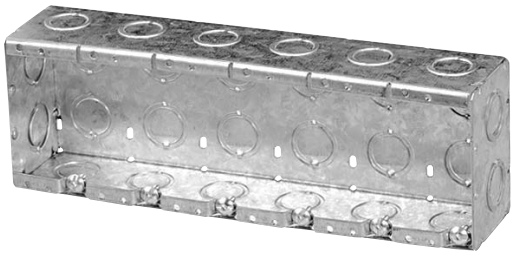

CIMBS-6-K

1 gang to 6 gangs

CIMBS-P

BCMBD-1-K

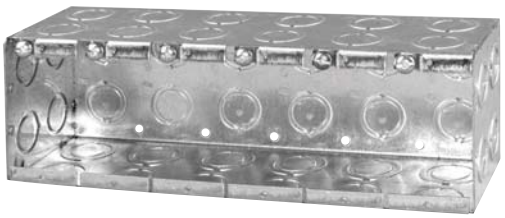

CIMBD-6-K

1 gang to 6 gangs

CIMBD-P

Technical Specifications

Cat. No.	Volume (Cu. in.)	Number of Gangs	Width (inches)	1/2" and 3/4" Concentric Knockouts sides	bottom	ends	1/2", 3/4" and 1" Concentric KOs (ends)
2-1/2" Deep x 3-3/4" High							
CIMBS-1-K	14.0	1	2	4	2	2	-
CIMBS-2-K	28.0	2	3-25/32	4	4	4	-
CIMBS-3-K	42.0	3	5-19/32	4	6	6	-
CIMBS-4-K	56.0	4	7-13/32	4	8	8	-
CIMBS-5-K	70.0	5	9-7/32	4	10	10	-
CIMBS-6-K	84.0	6	11-1/32	4	12	12	-
3-1/2" Deep x 3-3/4" High							
BCMBD-1-K	21.0	1	2	8	2	3	1
CIMBD-2-K	42.0	2	3-25/32	8	4	6	2
CIMBD-3-K	63.0	3	5-19/32	8	6	9	3
CIMBD-4-K	84.0	4	7-13/32	8	8	12	4
CIMBD-5-K	105.0	5	9-7/32	8	10	15	-
CIMBD-6-K	126.0	6	11-1/32	8	12	18	-

NOTE: On multi-gang boxes, lateral spacing between mounting holes is 1-13/16".

Cat. No.	Description
Accessories	
CIMBS-P	Steel partition for MBS 2-1/2" deep masonry boxes.
CIMBD-P	Steel partition for MBD 2-1/2" deep masonry boxes.

In accordance with C.E.C. 2006 Edition, Rule 12-3030, a partition must be used when conductors in a multi-gang box are connected to different sources of voltage.